



宇發機械有限公司

UFA MACHINERY CO., LTD.



RG-300L

前後自動、昇降伺服MPG
手輪控制

**Forward and backward
automatic movements,
and controlled with an
up/down servo MPG
hand wheel.**

特點 Features :

1. 上下採用伺服馬達傳動加上電子手輪控制

Adopts a servo motor for up/down transmission, plus an electronic hand wheel control.

2. 加大加寬的工作台能使切削水更快進入過濾裝置，能減少清理工作台面四周的時間


An enlarged and widen worktable enables machining water to flow into the filter device quickly. This also decreases the cleaning time around the worktable.

規格ITEM	型號 ITEM	RG-300	RG-300L
Table Size 研磨台面直徑		300	300
Max.grinding radius 磁盤最大研磨半徑		175	175
Max.height from Spindle center to chuck surface 工作台面至主軸中心距		350	350
Speed of rotary magnetic chuck 旋轉台轉速		10~100rpm	10~100rpm
Wheel size(diaxwidthxbore) 砂輪尺寸(直徑x寬x孔徑)		180x13x31.75	355x38x127
Spindle motor 主軸馬達		3 HP	5HP
Grinding wheel speed(50/60HZ) 主軸轉速		2850/3450 rpm	1450/1750 rpm
Vertical MPG per revolution 上下手輪進給(每轉)		0.01mm/MPG	
Vertical MPG per graduation 上下手輪進給(每刻度)		0.001mm/0.005mm/0.01mm/MPG	
Net weight 淨重/毛重		1200/1400kgs	1400/1600kgs
Packing size(LxWxH) 裝箱尺寸(長x寬x高)		1600x1600x2100 mm	1600x1600x2100 mm

※本公司保有修改規格設計之權利，如有變更恕不另行通知
All specification and designs are subjected to change without notice.



NC自動進刀操作畫面(RG-300NC&RG-300LNC)
Humanized System with Auto Downfeed

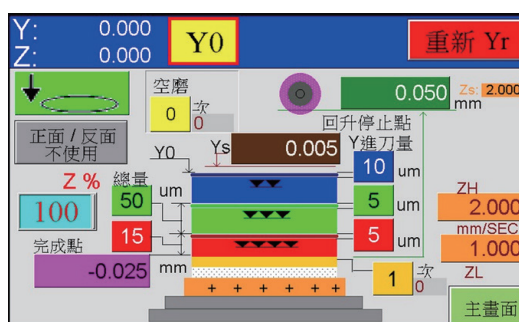

宇發機械有限公司

UFA MACHINERY CO., LTD.

42847 台中市大雅區大林路321巷11之1號

NO. 11-1, LN. 321, DALIN RD., DAYA DIST., TAICHUNG CITY 428, TAIWAN

TEL:04-25671108

FAX:04-25684540

E-mail:ufo.c1108@msa.hinet.net <http://www.ufo.net.tw>